

# Classic L-10



## Through-Feed Booth for manual coating

The manual coating booth Classic L-10 is designed for the double-sided manual coating with a conveyor system. But this booth can be used as simple automatic system as well.

### The Advantages of the Classic Standard Booth:



- Powder coated steel booth
- Stainless steel booth floor
- Integrated Illumination
- 2 mobile 80 l powder collecting hoppers
- Service doors for simplified filter cartridge changing
- Supervision of minimal exhaust air volume

## Technical Data (Standard-Styling)



A: min. 200  
 B: 1400 / 1800 mm  
 H2: min. 100 mm  
 H3: min. 300 mm  
 FH: 750, if  $H1 \leq 1400$  mm  
 1200, if  $H1 > 1400$  mm  
 L1: 600, if  $H1 \leq 1400$  mm  
 1300, if  $H1 > 1400$  mm

other dimensions on request

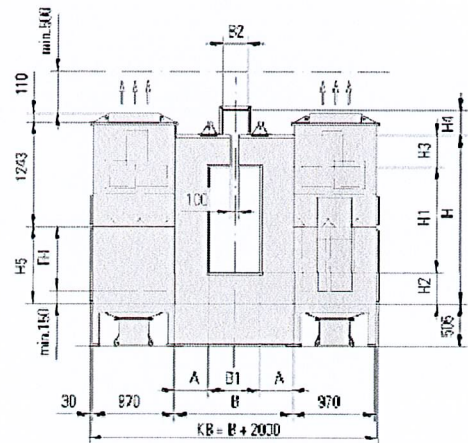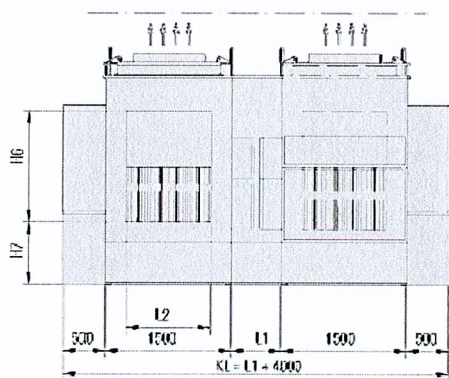

ITW Gema reserves the right to make technical changes without prior notice!

Filter:	2 x 5 Filter cartridges
Filter area:	2 x 48,75 m <sup>2</sup> , if FH = 750 2 x 78,00 m <sup>2</sup> , if FH = 1200
Filter Cleaning:	Jet with Venturi
Power:	2 x 3,0 kW, 3 x 380 - 420 V, 50 Hz
Exhaust air:	nominal: 2 x 6200 m <sup>3</sup> /h working range: 2 x 4500 - 5100 m <sup>3</sup> /h
Air consumption:	- with powder collecting hoppers: 2 x max. 15 Nm <sup>3</sup> /h - without powder collecting hoppers: 2 x max. 50 Nm <sup>3</sup> /h
Option:	30 l powder hoppers, fluidized with vibrating sieves